


Metal and Timber Fastening Self Drilling Roof and Wall Screws - Metal

Hex Washer Head with Seal Drill Point

- ~ **AS3566 Class 3 and Class 4 finishes.**
(Class 3 part numbers end in CS, Class 4 in Z4).
- ~ For fixing roof or wall cladding where waterproof seal is required.
- ~ External applications.

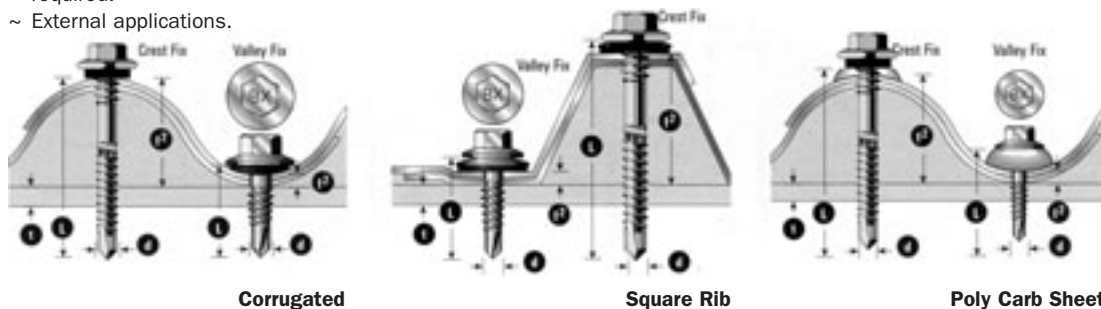


~ Corrugated Sheet Fixing

d Gauge - Pitch	L Screw Length	t Maximum Metal Thickness	f1 Maximum Capacity Fixing to Timber	f2 Maximum Capacity Fixing to Steel	Order No.	Box Quantity
10 - 16	16	4.5	-	2	6-310-0117-9CS	1000
	16	4.5	-	2	6-310-3117-5Z4	1000
12 - 14	20	4.5	-	6	6-310-0070-1CS	1000
	20	4.5	-	6	6-310-3070-8Z4	500
	35	4.5	-	21	6-310-0206-1CS	1000
	35	4.5	-	21	6-310-3260-8Z4	1000
	45	4.5	-	31	6-310-0261-2CS	1000
	45	4.5	-	31	6-310-3261-6Z4	1000
	55	4.5	-	41	6-310-0350-4CS	1000
	55	4.5	-	41	6-310-3350-4CS	1000
14 - 10	68	4.5	-	51	6-310-0326-2CS	1000
	68	4.5	-	51	6-310-3326-6Z4	1000
	25	3.0	-	9	6-310-3323-1Z4	500
	42	3.0	-	29	6-310-3110-8Z4	1000
	50	3.0	-	37	6-310-0111-2CS	1000
	50	3.0	-	37	6-310-3111-6Z4	1000
14 - 20	65	3.0	-	52	6-310-3124-5Z4	1000
	75	3.0	-	55	6-310-3322-3Z4	500
	95	6.3	-	76	6-310-3335-2Z4	500
	22	6.3	-	6	6-310-3029-2Z4	500

Metal and Timber Fastening Self Drilling Roof and Wall Screws - Metal cont.

Hex Washer Head Series 500 Extended Drill Point with Seal

- ~ **AS3566 Class 3 and Class 4 finishes.**
(Class 3 part numbers end in CS, Class 4 in Z4).
- ~ For fixing roof or wall cladding where a waterproof seal is required.
- ~ External applications.

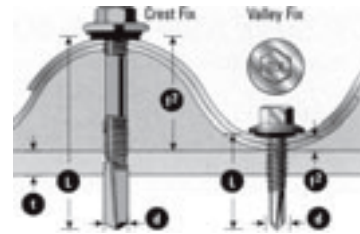

d Gauge - Pitch	L Screw Length	t Maximum Metal Thickness	f1 Maximum Capacity Fixing to Timber	f2 Maximum Capacity Fixing to Steel	Order No.	Box Quantity
12 - 24	32	12.5	-	3.2	6-350-0009-4CS	500
	50	12.5	-	21.2	6-350-0016-4CS	1000
	65	12.5	-	36.2	6-350-0017-2CS	1000

Metal and Timber Fastening Self Drilling Screws - Metal cont.

Button Head Drill Point

- ~ **Yellow Zinc Finish.**
- ~ For fixing metal to metal insulation foil to metal, where large bearing area is required for clamping.
- ~ Internal applications.



d Gauge - Pitch	Head Style	Finish	L Screw Length	t Maximum Metal Thickness	f2 Maximum Capacity Fixing to Steel	Order No.	Box Quantity
8 - 18	Button Head	Yellow Zinc	12	3.6	1	6-311-0352-7	1000
	Button Head	Yellow Zinc	20	3.6	9	6-311-0353-5	1000

Hex Washer Head Drill Point

- ~ **AS3566 Class 3 and Class 4 finishes.**
(Class 3 part numbers end in CS, Class 4 in Z4).
- ~ For fixing pre drilled metal or timber to metal.
- ~ For external applications.




d Gauge - Pitch	L Screw Length	t Maximum Metal Thickness	f1 Maximum Capacity Fixing to Steel	Order No.	Box Quantity
8 - 18	12	3.6	1	6-311-0008-1CS	1000
10 - 16	16	4.5	2	6-311-0151-4CS	1000
	16	4.5	2	6-311-3151-1Z4	1000
12 - 14	20	4.5	6	6-311-0097-4CS	500
14 - 10	65	3.0	52	6-311-3149-1Z4	1000
14 - 20	22	6.3	6	6-311-0038-5CS	1000

Available coloured, contact your local **Ramset™** branch.

Hex Washer Head Series 500 Extended Drill Point

- ~ **AS3566 Class 3 finish.**
- ~ For fast fixing of pre drilled metal or timber to heavy gauge metal.
- ~ External applications.

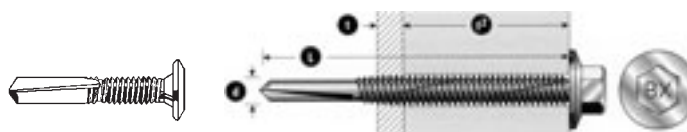

d Gauge - Pitch	L Screw Length	t Maximum Metal Thickness	f1 Maximum Capacity Fixing to Steel		Order No.	Box Quantity
12 - 24	32	12.5	4	Hex Head	6-351-0001-5CS	1000
12 - 24	32	12.5	4	Wafer Head	6-351-0005-8CS	1000

Other Hex Head Lengths are available on request