


### Metal and Timber Fastening Self Drilling Metal Screws

#### Countersunk Head Drill Point

- ~ **Yellow Zinc Finish.**
- ~ For fixing pre drilled timber and metal to metal.
- ~ Internal applications.

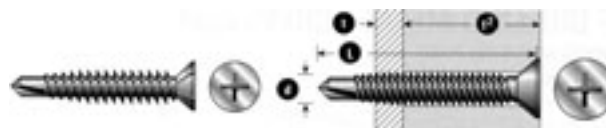


Counter Sunk Ribbed

Standard Head

d Gauge - Pitch	Head Style	L Screw Length	t Maximum Metal Thickness	f2 Maximum Capacity Fixing to Steel	Order No.	Box Quantity
10 - 24	Standard	40	4.5	28	6-311-0031-8	1000
	Standard	50	4.5	38	6-311-0034-2	500
	Standard	65	4.5	51	6-311-0058-4	500

#### Countersunk Ribbed Head Winged Drill Point

- ~ **Yellow Zinc Finish.**
- ~ For fixing timber and chipboard to steel framing.
- ~ Internal applications.

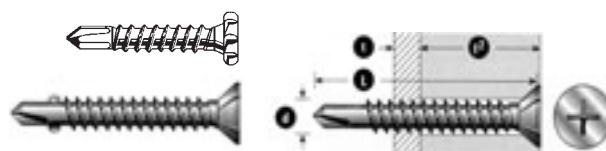

d Gauge - Pitch	Head Style	L Screw Length	t Maximum Metal Thickness	f2 Maximum Capacity Fixing to Steel	Order No.	Box Quantity
6 - 20	C'sunk Ribbed	50	2.8	38	6-321-0045-8	1000
8 - 18	Self Embedding	35	2.5	20	6-321-0041-5	1000
10 - 16	Climacoat C'sunk Ribbed	45	4.5	29	6-321-0040-7CC	1000
	C'sunk Ribbed	55	4.5	44	6-321-0042-3	1000
	C'sunk Ribbed	75	4.5	54	6-321-0043-1	1000
14 - 20	C'sunk Ribbed	50			6-321-0006-8	1000

#### Wafer Head Drill Point

- ~ **Yellow Zinc Finish** for internal use.
- ~ **AS3566 Class 3** for external use.
- ~ General purpose fixing to metal.
- ~ Internal applications.



Wafer Head

d Gauge - Pitch	Head Style	Finish	L Screw Length	t Maximum Metal Thickness	f2 Maximum Capacity Fixing to Steel	Order No.	Box Quantity
8 - 18	Wafer	Yellow Zinc	12	3.6	1	6-311-0009-2	1000
10 - 16	Wafer	CL3	16	3.5	2	6-311-0150-6MP	1000
	Wafer	CL3	22	4.5	8	6-311-0179-9MP	1000
	Wafer	CL3	30	4.5	16	6-311-0535-7MP	500
10 - 24	Wafer	CL3	16	4.5	2	6-311-0021-3MP	1000
	Wafer	CL3	40	4.5	16	6-311-0312-9MP	500

### Metal and Timber Fastening Self Drilling Screws cont.

**Mini Corrugate Fasteners - suitable for fixing to metal or timber**


#### Rippletek

~ For fixing mini corrugated sheet to **timber**.



d Gauge - Pitch	L Screw Length	t Maximum Metal Thickness	f1 Maximum Capacity Fixing to Steel	Order No.	Box Quantity
10 - 16	30			6-031-0302-9MP	1000

~ For fixing mini corrugated sheet to **steel**.

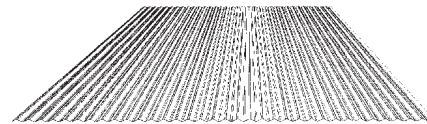

d Gauge - Pitch	L Screw Length	t Maximum Metal Thickness	f1 Maximum Capacity Fixing to Steel	Order No.	Box Quantity
10 - 16	20			6-311-0474-22A	1000